






□ Type A27

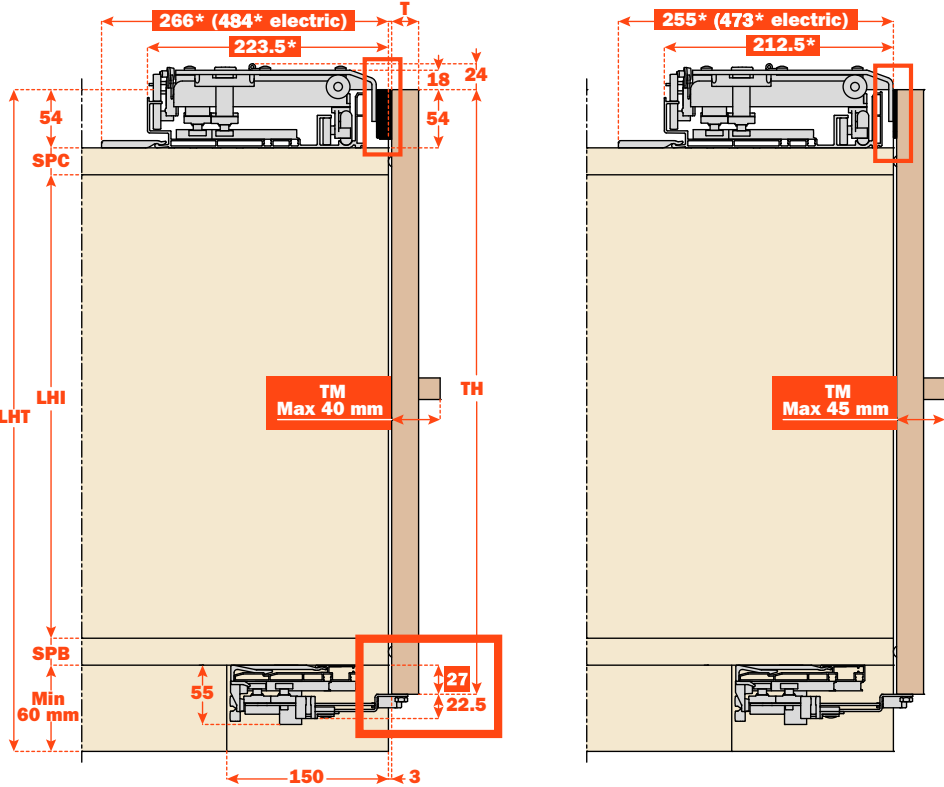




□ Type A43

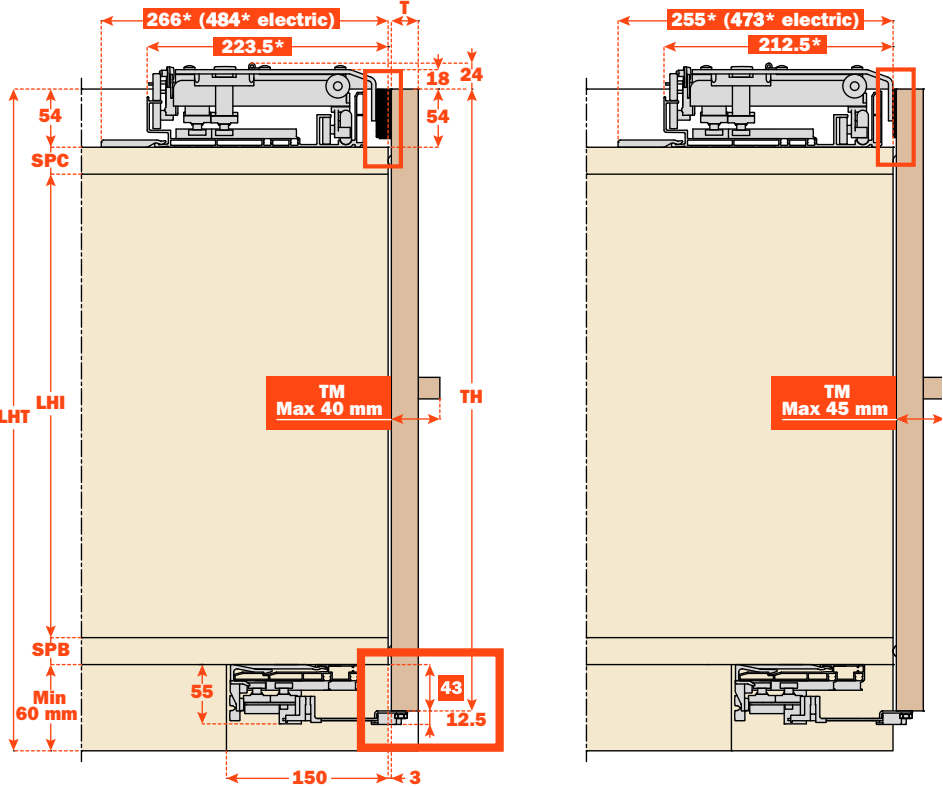


* With Clipper frame (+6 mm)




* With Clipper frame (+6 mm)

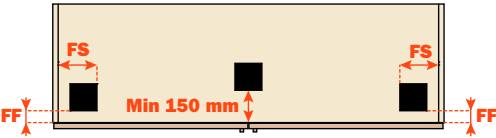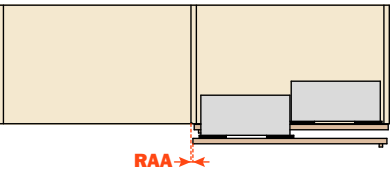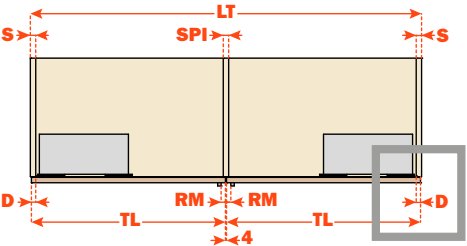


□ Type B27

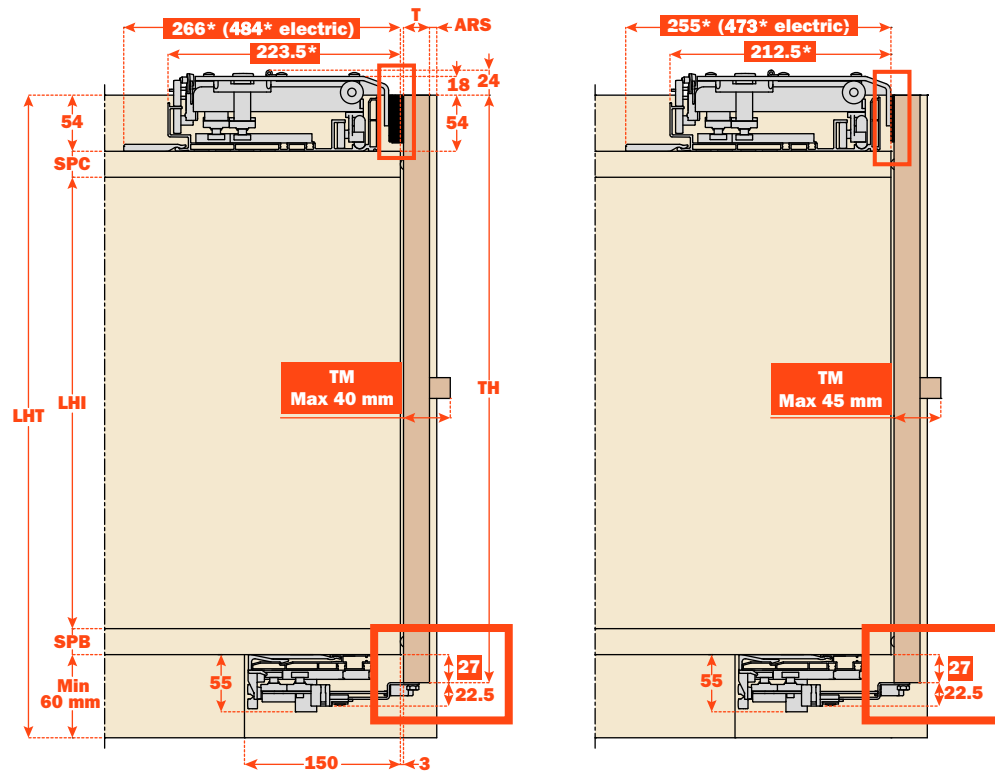





* With Clipper frame (+6 mm)




□ Type B43

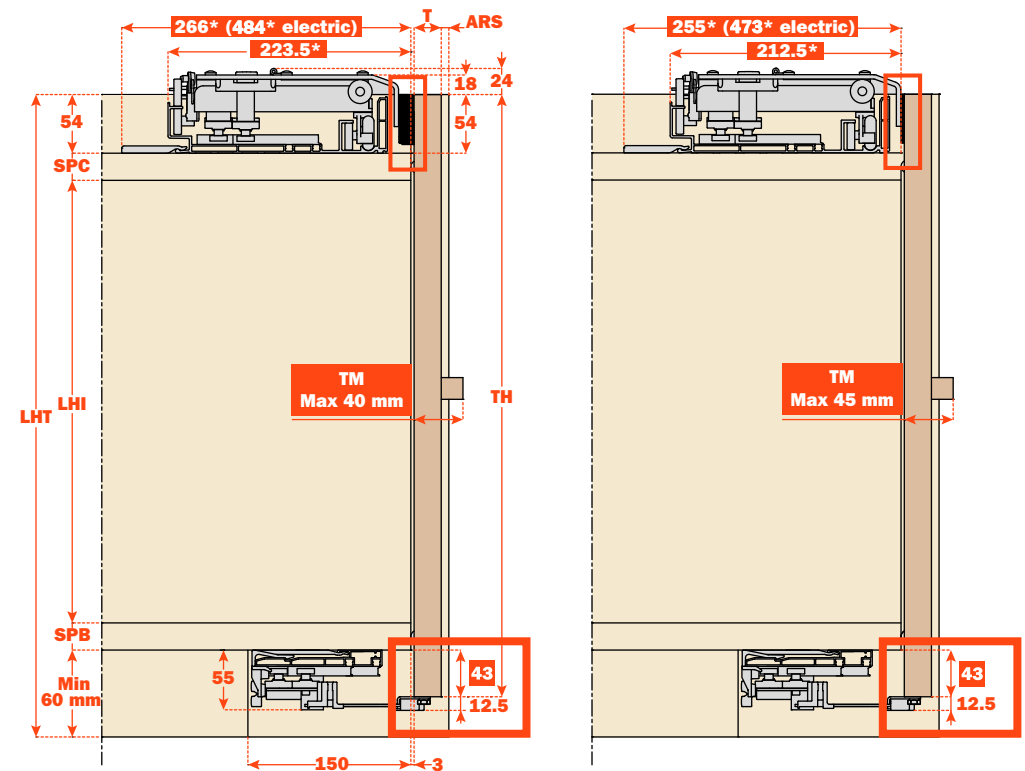


* With Clipper frame (+6 mm)

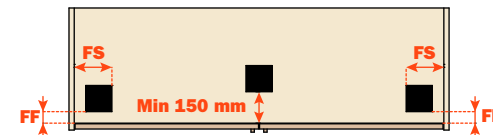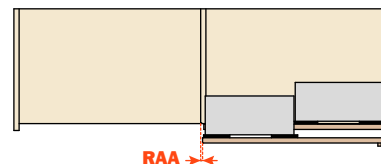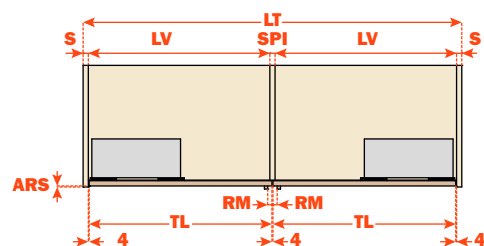





- ☐ Standard
- ☐ One Left
- ☐ One Right

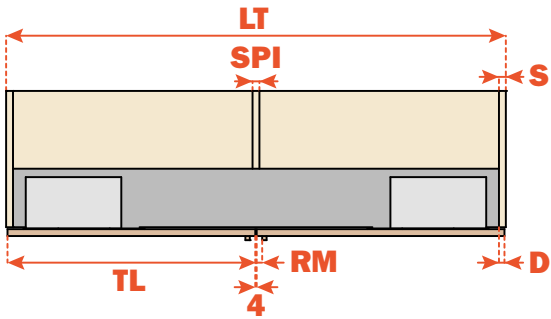

- ☐ Step

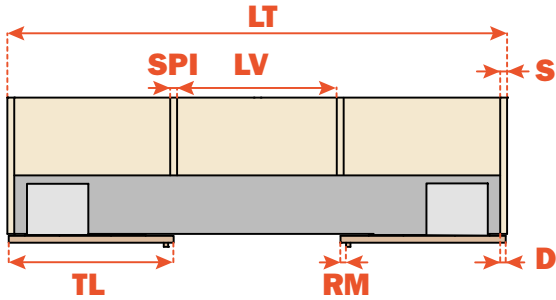

- ☐ Reverso

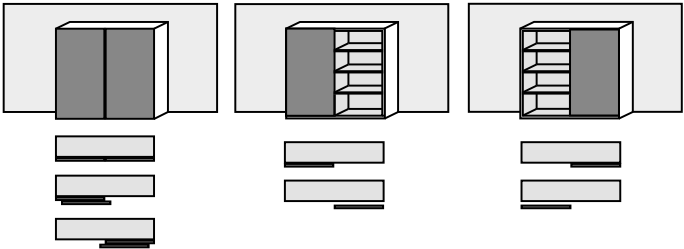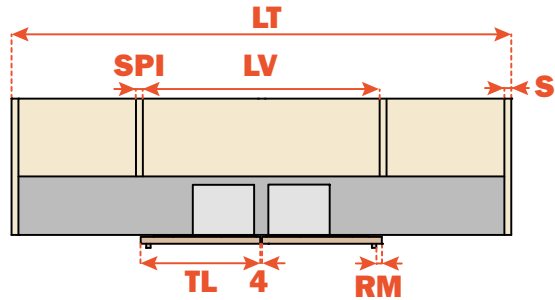

LHT	Total height of cabinet (mm)	
SPC	Thickness of top panel (mm)	
LHI	Internal height of cabinet (mm)	
SPB	Thickness of bottom panel (mm)	
TM	Thickness of door + handle (mm) • with recessed adjusters min 18 mm • max 45 mm • with surface-mounted adjusters min 18 mm • max 40 mm	
TH	Height of door (mm) • min 1200 mm • max 2200 mm	
T	Thickness of door (mm)	
LT	Total width of cabinet (mm)	
SPI	Thickness of central panel (mm)	
S	Thickness of side panel (mm)	
TL	Width of door (mm) • min 600 • max 2000	
RM	Distance from edge of the door to the handle (mm)	
D	Coverage of door on side panel (mm)	
LV	Internal width of cabinet (mm)	
ARS	Space between door and structure (mm)	
FF	Space between foot and front panel (mm)	
FS	Space between foot and side panel (mm)	

Power ☐

☐

☐

Contact name
Company
Date
Project
Notes