

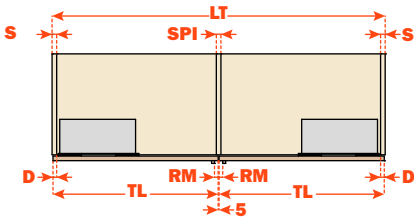

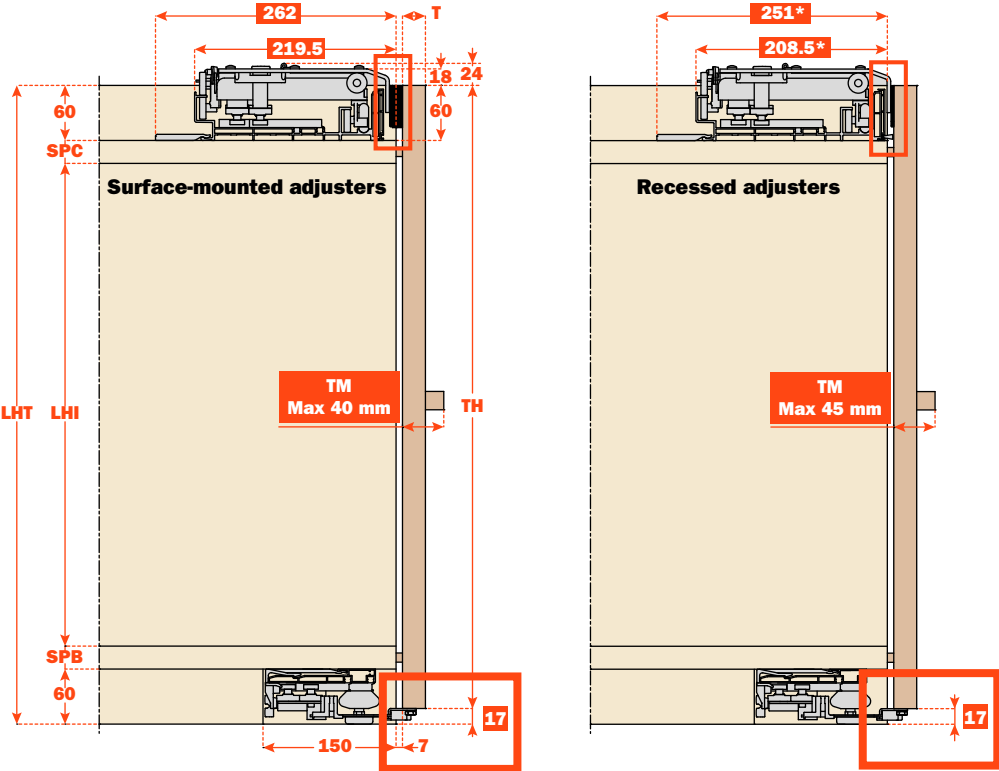



Slider M50

Type 17




Type 33

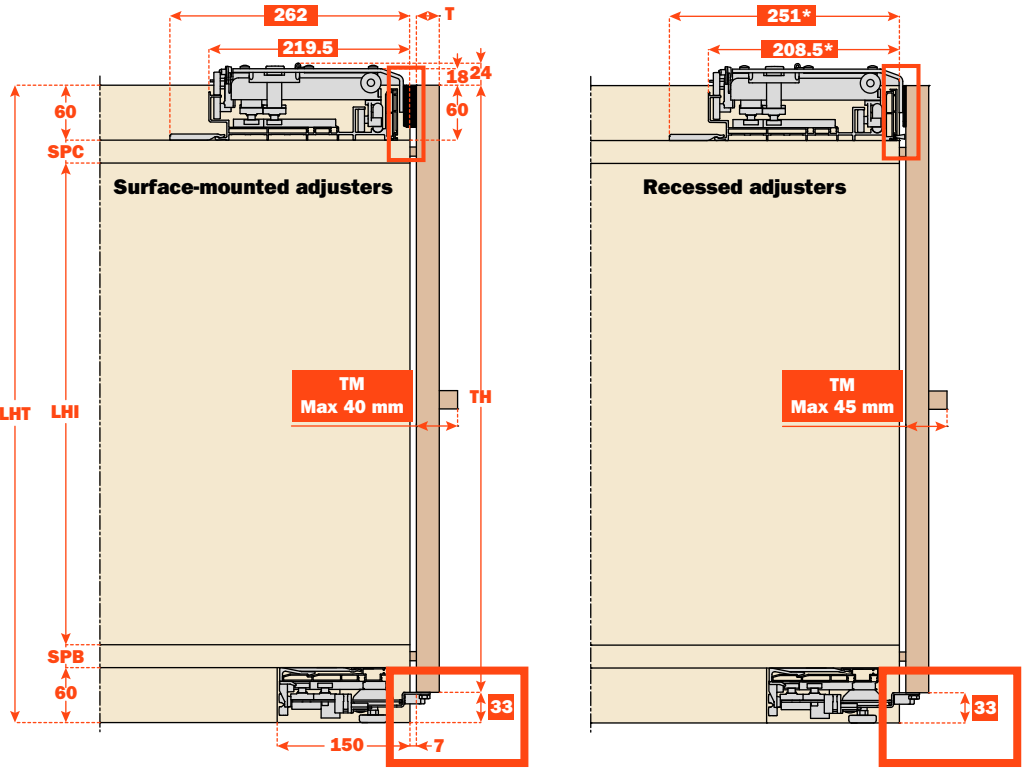


Slider M50





- ☐ Standard
- ☐ One Left
- ☐ One Right

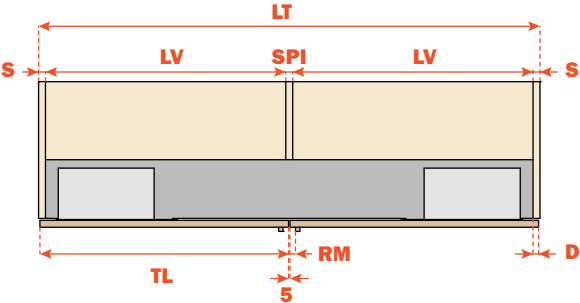

- ☐ Step

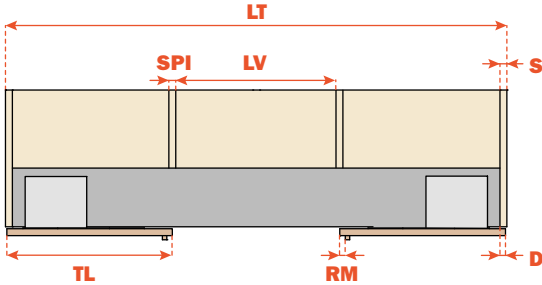

- ☐ Reverso

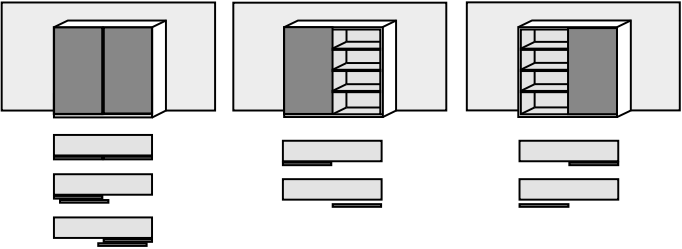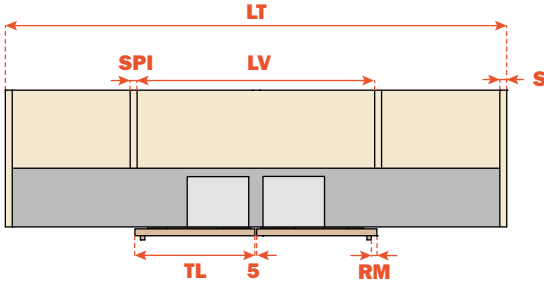

LHT	Total height of cabinet (mm)	
SPC	Thickness of top panel (mm) • min 18mm	
LHI	Internal height of cabinet (mm)	
SPB	Thickness of bottom panel (mm)	
TM	Thickness of door + handle (mm) • min 18mm - max 40mm/45mm recessed adj.	
TH	Height of door (mm) • max 3000mm	
FS	Space between foot and side panel (mm)	
FF	Space between foot and frontal panel (mm)	
SPI	Thickness of central panel (mm) • min 18mm	
S	Thickness of side panel (mm)	
TL	Width of door (mm) • min 800mm - max 2000mm	
LT	Total width of cabinet (mm)	
RM	Distance from edge of the door to the handle (mm) • min 10mm	
D	Coverage of door on side panel (mm)	
LV	Internal width of cabinet (mm)	
T	Thickness of door (mm)	

Contact name
Company
Date
Project
Notes